


TECHNICAL DATA SHEET - 123mm Stainless Steel Slotted Grate - Class A

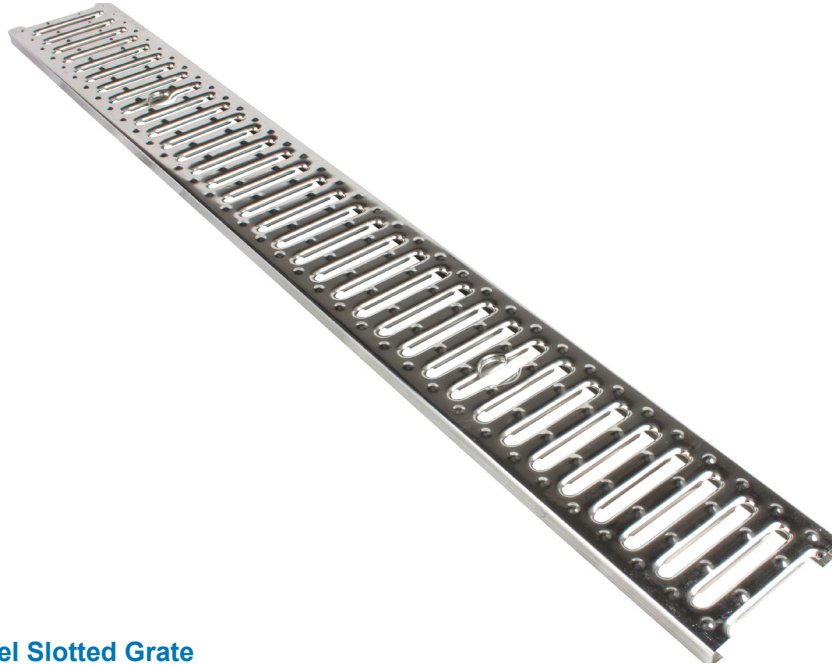


Hydro Stainless Steel Slotted Grate

Certified to load class A 10kN (AS3996), point load approximately 330kgs.
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of 27,540mm² per metre of grate.
 Grates compatible with MEA Supreme/Solution LS/S1000 channel systems & inline sumps.
 Manufactured from pressed stainless steel.
 Installation must be in accordance with the installation instructions from the manufacturer.
 Total width of grate is 123mm.

Locking Mechanisms

Standard locking system offer securement to channel units or inline sumps.
 For 60mm deep channels, use Clipfix locking mechanism listed below.

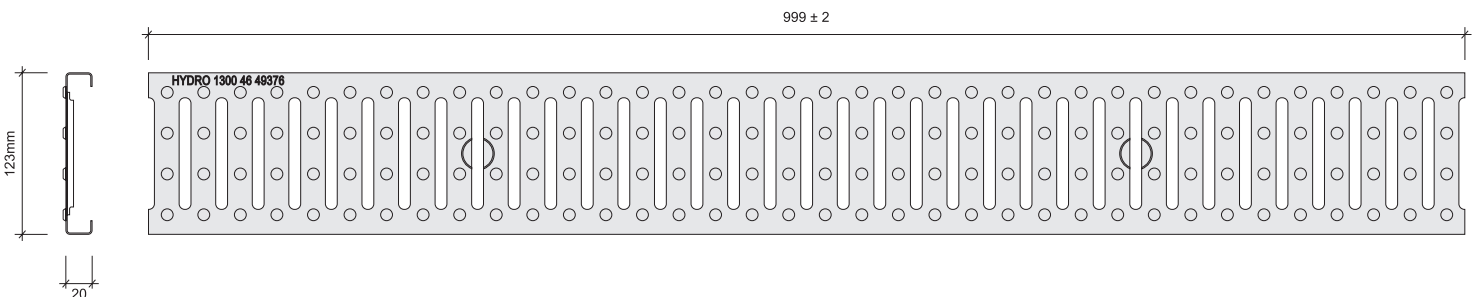

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
123mm Stainless Steel Slotted Grate	Stainless Steel	1,000mm	152201	2.3
Standard Locking Mechanism - LZ/Z1000 Channels	Stainless Steel	N/A	147110	0.2
Clipfix Locking Mechanism For Slotted Grates - LS1000.0/60 Channels	Plastic	N/A	152404	0.1

TOLL FREE: 1300 GO HYDRO | hydrocp.com.au

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)