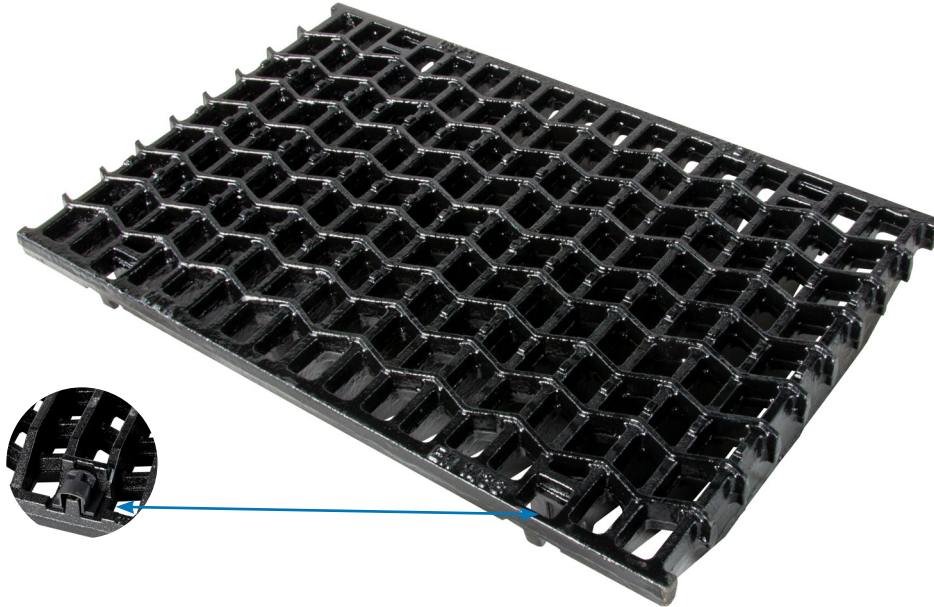



**TECHNICAL DATA SHEET - 322mm Ductile Iron Wave Grate STARFIX - Class E**

**Hydro Ductile Iron Wave Grate - Starfix**

Load class E 400kN (AS3996), point load approximately 13,700kgs.  
 Compliant for wheelchair & walking cane safety (AS1428.2 - Clause 9).  
 Compliant for bicycle tyre penetration resistance (AS3996 - Clause 3.3.6).

Intake area of approximately 66,074mm<sup>2</sup> per half metre of grate.  
 Grates compatible with **Mearin Plus/Expert 300** channel system.  
 Manufactured from ductile iron with KTL coating,  
 Installation must be in accordance with the installation instructions from the manufacturer.  
 Total width of grate is 322mm.

**Locking Mechanisms**

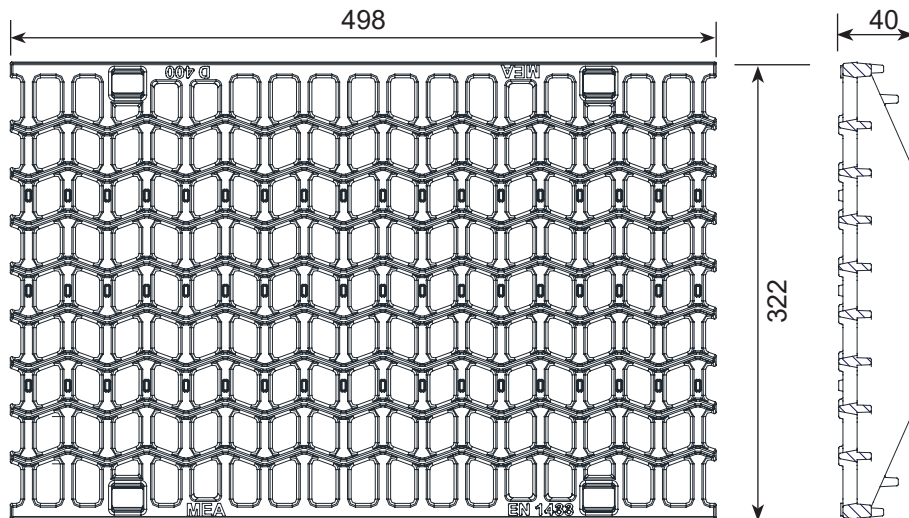Starfix locking system offers securement to channel units.


**PRODUCT SPECIFICATION**

DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
322mm Ductile Iron Wave Grate - Starfix	Ductile Iron	498mm	140450	19

TOLL FREE: 1300 GO HYDRO | [hydrocp.com.au](http://hydrocp.com.au)

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)