

**TECHNICAL DATA SHEET - 223mm Ductile Iron Longitudinal Heelguard Grate - Class D CLIPFIX**




**Hydro Ductile Iron Longitudinal Heelguard Grate CLIPFIX**

Certified to AS3996 Load Class D210, point load approximately 8,000kg.  
 Compliant for wheelchair and walking cane safety AS1428.2.  
 Compliant for bicycle tyre penetration AS3996.  
 Compliant for surface openings in pedestrian areas AS3996.

Intake area of 31,752mm<sup>2</sup> per half metre grate.  
 Manufactured from ductile iron with KTL coating.  
 Grates suitable for Hydro Supreme/Access AC/AS/LZ/LS/Z/S2000 channel units and inline sumps.  
 Total width of grate 223mm.

**Locking Mechanisms**

Clipfix locking mechanism offers securement to channel units or inline sumps. Grate is compatible with MEA Supreme/Solution channel systems AC/AS2000, LZ/LS2000, Z/S2000.

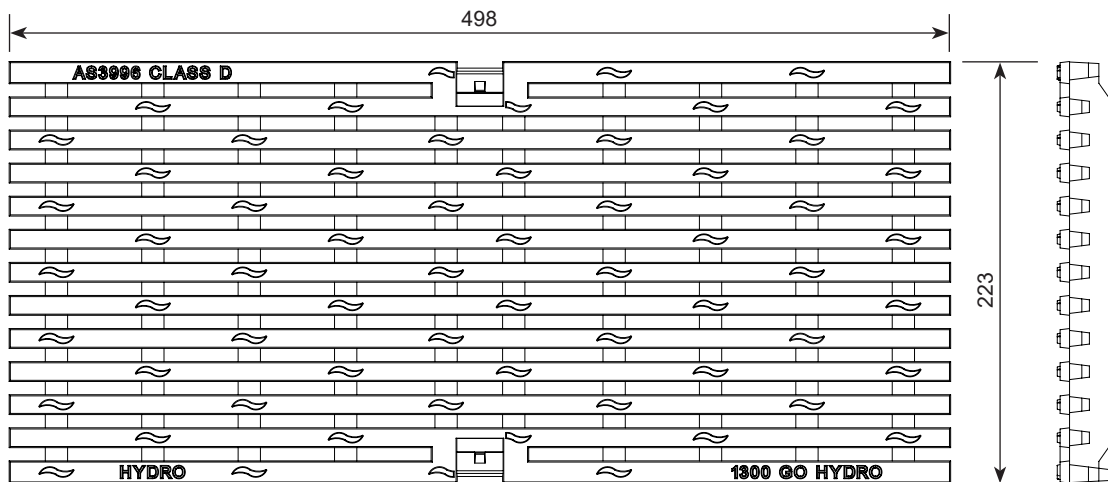

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
223mm Ductile Iron Longitudinal Heelguard Grate 0.5M Class D CLIPFIX	Ductile Iron	498mm	152801	10

TOLL FREE: 1300 GO HYDRO | [hydrocp.com.au](http://hydrocp.com.au)

[DRAIN](#) • [STAINLESS](#) • [DIAMOND TOOLS](#) • [GRATES & FRAMES](#) • [CABLEPIT](#) • [COVERS](#)