

TECHNICAL DATA SHEET - 223mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX - Class D





Hydro Galvanised Steel Longitudinal Heelguard Grate

210KN, point load approximately 8,000Kgs.
 Certified to Load Class D210 (AS3996).
 Compliant for surface openings in pedestrian areas (AS3996).
 Certified for Slip resistance for Wet Pendulum Test (AS4586:P5).
 Compliant for wheelchair and walking cane safety (AS1428.2- Clause 9).
 Compliant for bicycle tyre penetration resistance (AS3996- Clause 3.3.6).

Intake area of approximately 131,211mm² per mete of grate.
 Grates compatible with MEA Supreme/Solution LZ/ AZ2000, LS/AS2000 channel systems & inline sumps, & Mearin Plus 200 Channels.
 Manufactured from mild steel (hot dipped galvanised).
 Installation must be in accordance with the installation instructions from the manufacturer.
 Total width of grate is 223mm.

Locking Mechanisms

Clipfix locking system offer securement to channel units or inline sumps.
 Anti-Shunt clips prevent the grates from sliding along the channels.

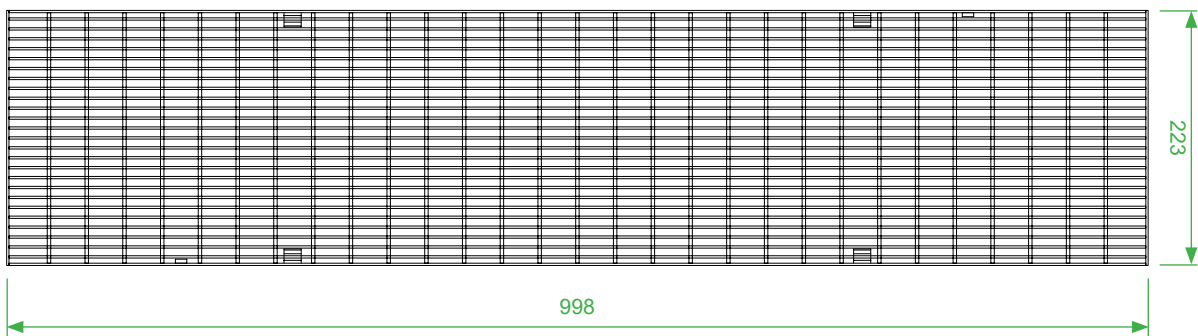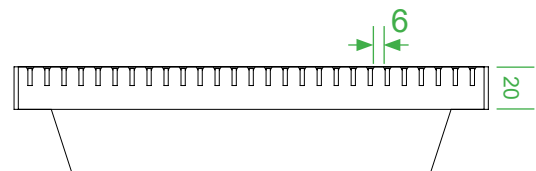

PRODUCT SPECIFICATION				
DESCRIPTION	MATERIAL	LENGTH	PRODUCT CODE	WEIGHT (KG)
223mm Galvanised Steel Longitudinal Heelguard Grate CLIPFIX	Galvanised Steel	998mm	160120HG	8.0