Jaybro
CONSIDER IT DONE.

MEA
EXCLUSIVE SUPPLIER OF

200mm Clear Opening Ductile Iron Slotted Trench Grate & Frame - Class E

Ductile Iron Slotted Trench Grate & Frame

Certifies to AS3996:2019 load class E400kN, point load approximately 13,700kg.
Compliant for wheelchair & walking cane safety AS1428.2.
Compliant for bicycle tyre penetration AS3996:2019.
Compliant for surface openings in pedestrian areas (AS3996:2019).

Intake are of approximately 218.880mm² per two metre length.
Manufactured from ductile iron with KTL coating.
Frames constructed from the same edge rails from MEA's Supreme "C" series channels.

Locking Mechanism

Integrated MEA Profix locking system ensures grates can't move once installation into the frame is complete.

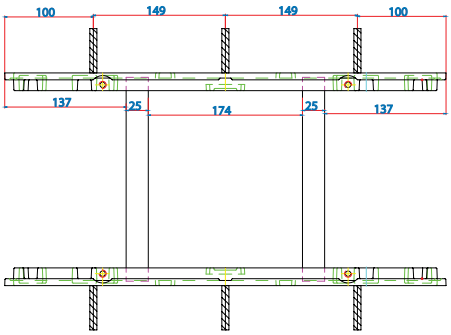

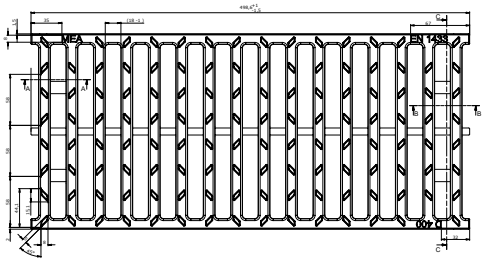

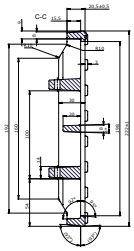

PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
200mm Clear Opening Ductile Iron Trench Frame (2 Metres Long)	Ductile Iron	2,000mm	200CIF	15.0
222mm Ductile Iron Slotted Grate 0.5m Class E Profix (4 required per frame)	Ductile Iron	498mm	153563	9.0