

## 300mm Clear Opening Ductile Iron Heelguard Trench Grate & Frame - Class E




### Ductile Iron Longitudinal Heelguard Grate PROFIX

Certifies to AS3996:2019 load class E400kN, point load approximately 13,700kg.  
Compliant for wheelchair & walking cane safety AS1428.2.  
Compliant for bicycle tyre penetration AS3996:2019.

Intake are of approximately 170,968mm<sup>2</sup> per two metre length.  
Manufactured from ductile iron with KTL coating.  
Frames constructed from the same edge rails from MEA's Supreme "C" series channels.

### Locking Mechanism

PROFIX locking system offers securement for the grates to the frames.

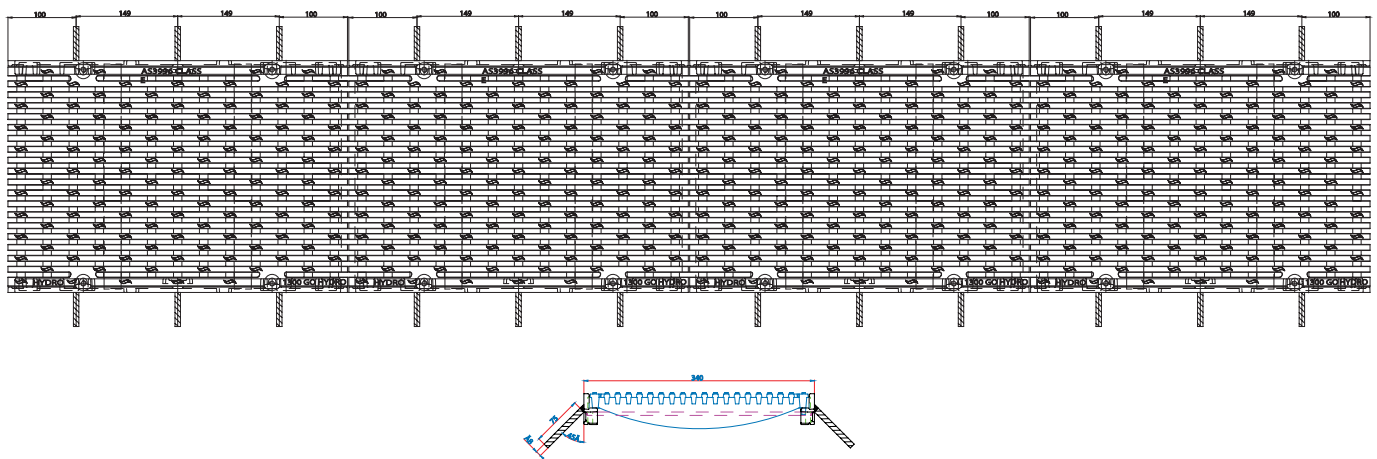

### PRODUCT SPECIFICATION

DESCRIPTION	MATERIAL	LENGTH	PART NO.	WEIGHT (kg)
300mm Clear Opening Ductile Iron Trench Frame (2 Metres Long)	Ductile Iron	2,000mm	300CIF	17.0
322mm Ductile Iron Slotted Grate 0.5m Class E PROFIX	Ductile Iron	498mm	723400	16.6